


ARISTA[®]

Talk to us. We listen.

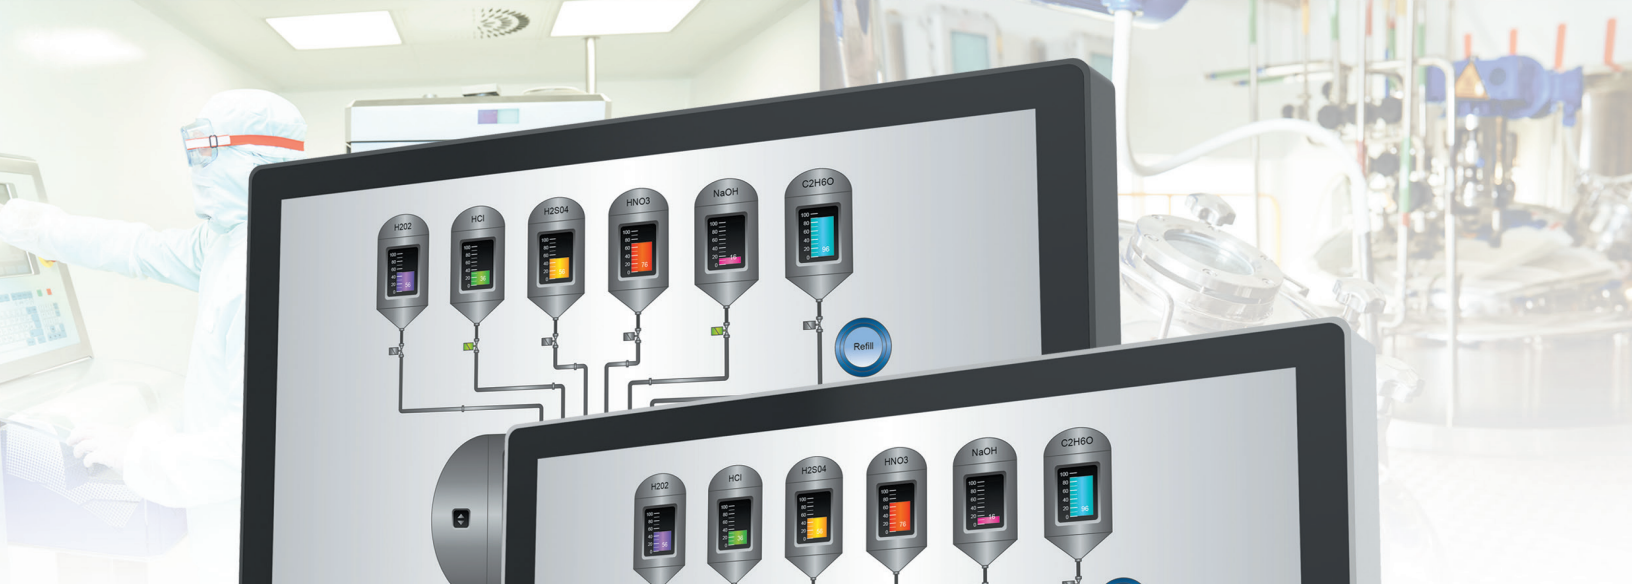

ADM-2121BP

21.5" 300 Nits IP50 VESA Display, IP 50, Capacitive Touch

VESA Mount • Flush Bezel • Multi-Touch

Specifications	ADM-2121BP
LCD Display	
Display Size (Diagnol)	21.5"
Resolution	1920 x 1080
Backlight Lifetime (Hours)	50,000 hours
Visual Characteristics	
Colors	16.7 millions
Aspect ratio	16:9
Viewing angle (V/H)	178° / 178°
Response time (Typical)	14 ms
Pixel Pitch (mm)	0.248 x 0.248
Contrast ratio	1000 : 1
Brightness	250 nits
Input Interface	
VGA	Yes *Not available with ARD
DVI	Yes *Not available with ARD
HDMI	Yes
Display Port	N/A
CVBS	N/A
YPbPr	N/A
Touch Screen	
Technology	Projected capacitive touch
Touch rating	50 Million Touches
Interface	USB
Driver	Windows 7 & up
Enclosure	
Type	Metallic Housing
Color	Black / White
Power / Thermal Specs	
Power Requirement (Max)	24VDC / 0.93A or PoE
Power Consumption (Max)	23W
Recommended Power Supply	32W
Heat Dissipation	77 BTU/hr
Physical Information	
Mounting	VESA Mount
Net Weight	N/A
Physical Dimension(WxHxD)	20.88 x 12.92 x 3.02 inch 530.3 x 328.1 x 76.7 mm
Recommended Cutout Dimension (WxH)	N/A
Environmental	
Operating Temperature	0~50°C (32~122°F)
Storage Temperature	-20~60°C (-4~140°F)
Relative Humidity	5% to 95% non-condensing
IP/NEMA Rating	Meets IP50
Certification	N/A

Ordering Information		
	ADM-2121BP-001	ADM-2121BP-005
LCD Display	21.5" LCD / 1920 x 1080	21.5" LCD / 1920 x 1080
Touch Screen	Projected Capacitive	Projected Capacitive
Enclosure	Black	White
Power Supply	110/220VAC Input	110/220VAC Input
	ADM-2121BP-00A	ADM-2121BP-00E
LCD Display	21.5" LCD / 1920 x 1080	21.5" LCD / 1920 x 1080
Touch Screen	Projected Capacitive	Projected Capacitive
Enclosure	Black	White
Power Supply	PoE	PoE
Extender Video Input	HDMI via ARD-1007A-TX	HDMI via ARD-1007A-TX

ADM-2121BP

