




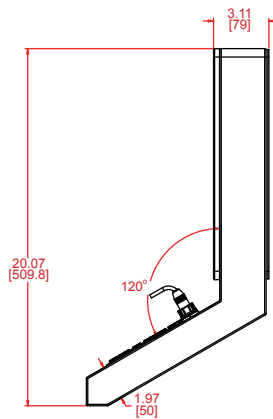

Product Specifications	AMA-2121AX
LCD Display	
Display Size	21.5 inch
Max Resolution	1920 x 1080
Backlight Lifetime	50,000 hours
Visual Characteristics	
Colors	16.7 millions
Aspect ratio	16:9
Viewing angle (V/H)	178° / 178°
Response time	14 ms
Pixel Pitch (mm)	0.248 x 0.248
Contrast ratio	1000 : 1
Brightness	250 nits
Input Interface	
VGA	N/A
DVI	N/A
HDMI	Yes. Through ARD
Display Port	N/A
CVBS	N/A
YPbPr	N/A
Touchscreen	
Technology	Projected Capacitive
Touch Rating	50 Million Touches
Interface	1000 : 1
Driver	Windows 7 & up
Enclosure	
Enclosure	Stainless Steel
Protection	Meets NEMA 4X
Power/Thermal Specs	
Power Requirement (Max)	PoE
Power Consumption (Max)	15 W
Recommended Power Supply	21 W
Heat Dissipation	51 BTU/hr
Physical Information	
Mounting	Pedestal
Net Weight	38 Lbs / 17.24 Kg (58 Lbs / 26.31 Kg with XTM-002)
Physical Dimension (WxHxD)	20.94 x 20.07 x 10.26 inch
	(20.94 x 58.32 x 10.26 inch with XTM-002)
	(532.0 x 509.8 x 260.5 mm 532.0 x 1481.5 x 260.5 mm with XTM-002)
Recommended Cutout Dimension (WxHxD)	N/A
Environmental	
Operating Temp	0°C to 50°C (32°F to 122°F)
Storage Temp	-20°C to 60°C (-4°F to 140°F)
Humidity	5% to 95% non-condensing
Rating	Meets NEMA 4X
Certification	N/A

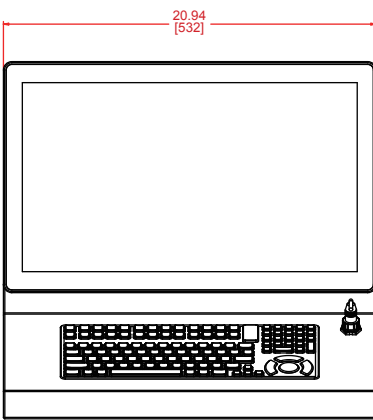

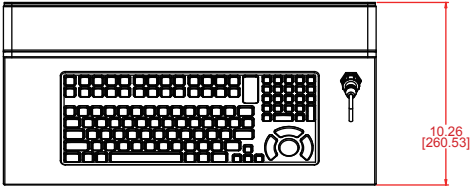

Keyboard Option A



Keyboard Option B



Keyboard Option C

Ordering Information	
	AMA-2121AX-0AA
LCD Display	21.5" LCD / 1920 x 1080
Touch Screen	Projected Capacitive
Enclosure	Stainless Steel
Keyboard Option	Keyboard Option A
Power Supply	PoE
Extender Video Input	HDMI via ARD-1007A-TX
	AMA-2121AX-0BA
LCD Display	21.5" LCD / 1920 x 1080
Touch Screen	Projected Capacitive
Enclosure	Stainless Steel
Keyboard Option	Keyboard Option B
Power Supply	PoE
Extender Video Input	HDMI via ARD-1007A-TX
	AMA-2121AX-0CA
LCD Display	21.5" LCD/1920 x 1080
Touch Screen	Projected Capacitive
Enclosure	Stainless Steel
Keyboard Option	Keyboard Option C
Power Supply	PoE
Extender Video Input	HDMI via ARD-1007A-TX

